

Add-A-Station Feeder (Inserter Series)

Overview

Add an inserter station fast and easily

Quickly turn your 6 station inserter into 7, 8 or 9 stations. Or have the ability to turn your 12 station inserter up to a 20 station inserter. Set up is quick and easy. Simply clamp the new feeder onto your existing inserter's front table and go!

The Inserter Feeder Series includes the Add-A-Station feeder. It's an easy to install, space saving feeder that's compatible with today's leading inserters.

Standard Features


- Add to existing inserters • Move from one inserter to another
- Quick and easy installation • High throughput, low cost • Missed Product Detect • Dynamic Rotation Technology®

Optional Features

- Batch Count

Products (ask us about your products)

- | | | |
|-----------------|----------------|-------------|
| Loyalty Cards | Credit Cards | Phone Cards |
| Insurance Cards | Business Cards | and more |

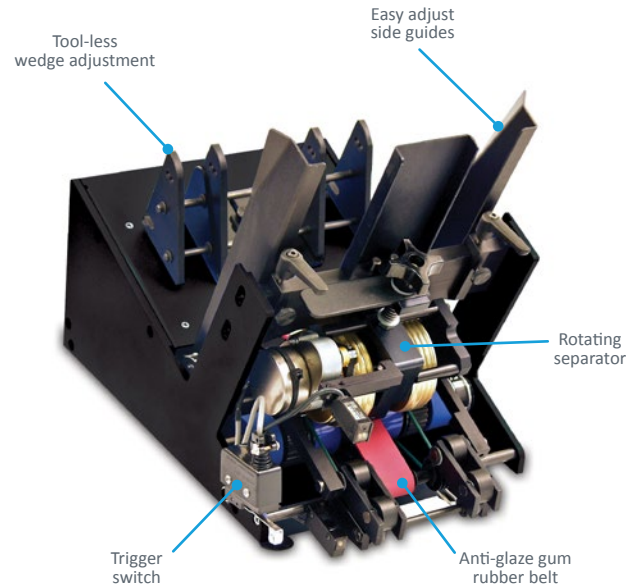

Easy front table mounting

Hold down arm activates feeder

Feeder doesn't inhibit station

Specifications	
Maximum Product Size	9.0 W x 5.5 L in (229 x 140 mm)
Minimum Product Size	5.0 W x 3.0 L in (127 x 76 mm)
Min/Max Product Thickness	.002 - .250 in (.05 - 6.35 mm)
Feeder Hopper Capacity	10" (254 mm) vertical; 18" (457 mm) optional
Speed	Variable 20 to 350 ft./min. (6 to 106 m/min.)
Utilities	120/240vac, 50/60Hz, 1A
Weight	Only 19 lbs. (8.62 kg)
Other sizes and thickness capabilities available. Contact us for your application.	

Footprint drawing available at:
www.streamfeeder.com/footprints.html
 or scan the QR Code



AMBEC | Fleetwood | Goldco | Nigrelli | Streamfeeder | SWF | Thiele