



AT Series (Tip-On and Card Attaching)

Overview


The AT-Series Card Attaching System will astound you with its speed and accurate tolerance range! The System can achieve unmatched speeds up to 20,000+ pieces per hour! With a wide range of product sizes, plenty of options and fully adjustable paper & card magazines the Card Attaching System gives you the flexibility you need to fulfill the most demanding product applications.

Standard Features

- Nordson® Hot Glue System with single gun
- Versatile card feeder • HMI touch screen • 72" FIT Vacuum Base

Optional Features

- FeedMAX S carrier feeder with 6 foot conveyor, 6 foot shingling conveyor • 9 foot conveyor upgrades (FeedMAX and shingling)
- 112" FIT Vacuum Base • Second card feeder (requires 112" base; may require additional glue system components) • Diverter

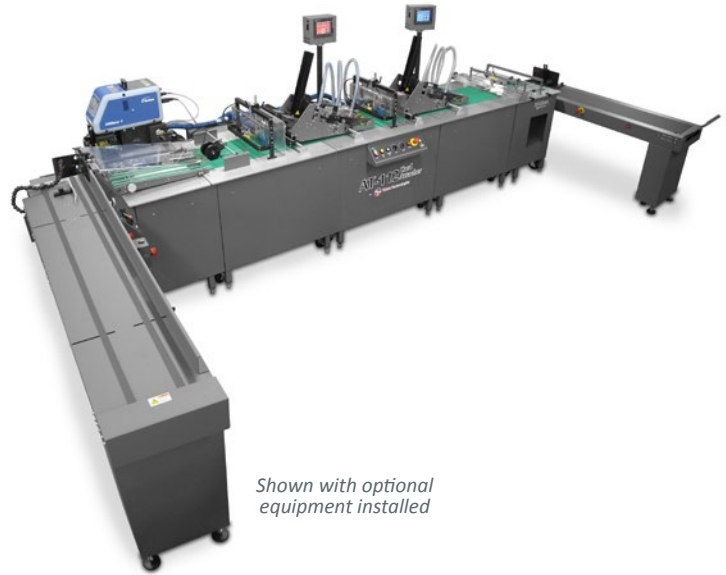

Shown with optional equipment installed

Products (ask us about your products)

- | | | |
|----------------|---------------------|----------------|
| Loyalty Cards | Insurance Cards | Magnets |
| Phone Cards | Gift Cards | Pouches |
| Business Cards | Faux Cards | Packets |
| Credit Cards | Postcards | Certified Mail |
| Pamphlets | Saddle Stitch Books | |

Specifications	
Maximum Carrier Size	FeedMAX S: 14.5 W x 13 L in (368 x 330 mm)
Minimum Carrier Size	FeedMAX S: 5 W x 3 L in (127 x 76 mm)
Maximum Card Size	4 W x 4 L in (102 x 102 mm)
Minimum Card Size	2 W x 2 L in (51 x 51 mm)
Carrier Magazine Capacity	72 in (183 cm)
Tolerance Range	+/- .125 in (3.175 mm)
Speed	Up to 20,000/hour
Utilities	240vac, 30A, 1 phase – multiple connections
	Air: 90 PSI – Nordson Glue System
<small>Other configurations available for smaller footprints, lower throughput, and existing equipment.</small>	

Footprint drawing available at:
www.streamfeeder.com/footprints.html
or scan the QR Code



AMBEC | Fleetwood | Goldco | Nigrelli | Streamfeeder | SWF | Thiele

