

***Unwinder
6802***

(shown with further modules)

General description

- Pneumatic fixing of the roller core
- Driven by AC motor (230 V, 16A)
- Optimized drive control through PCB (self learning after some time)
- Opto sensors in the Suction Box control the unwinding
- Lift to raise and drop the web roller
- Paper speed 120 m/min maximum
- Moving roller for quick start
- Internal paper store (controlled moving roller).
Ensures that enough web is available during quick starts.
Compensates the inertness of the heavy web rolls.

- Core diameter 70 mm (Adapter for 150 and 200 mm optionally)
- Adjustable light barrier for roller stop
- Self fixing feet
- Movable through integrated castors
- Automatic recognition of the web roller diameter
- Automatic recognition of the rotation direction
- One-button control via display (only Start/Stop)
- Interface to Müller-systems and laser printers
- Integrated suction box
- Compressor (optionally)

Technical Data

Unwinding speed: max. 120 metres/minute

Roll diameter: max. 1300 mm (51")

Roll width: max. 520 mm

Core diameter: 70 mm = Standard
6937: Core diameter 150mm (optionally)
6936: Core diameter 200mm (optionally)

Paper weight: min. 60 g/m²
max. 200 g/m²

Air pressure: 6 bar (Optionally: Compressor Mod. 6892)

Interface: UP3I (Optionally)

Voltage: 230 VAC (grounded socket without interplug - 16 A low burning)

Power consumption during continuous operation: 500 W/1800 kJ/h

Stand by: 100 W


Noise level: 69 dB/A

Weight: 450 kg

Finish: Two colours

Subject to alteration.

Mod. 6802/Release: 24.03.2010

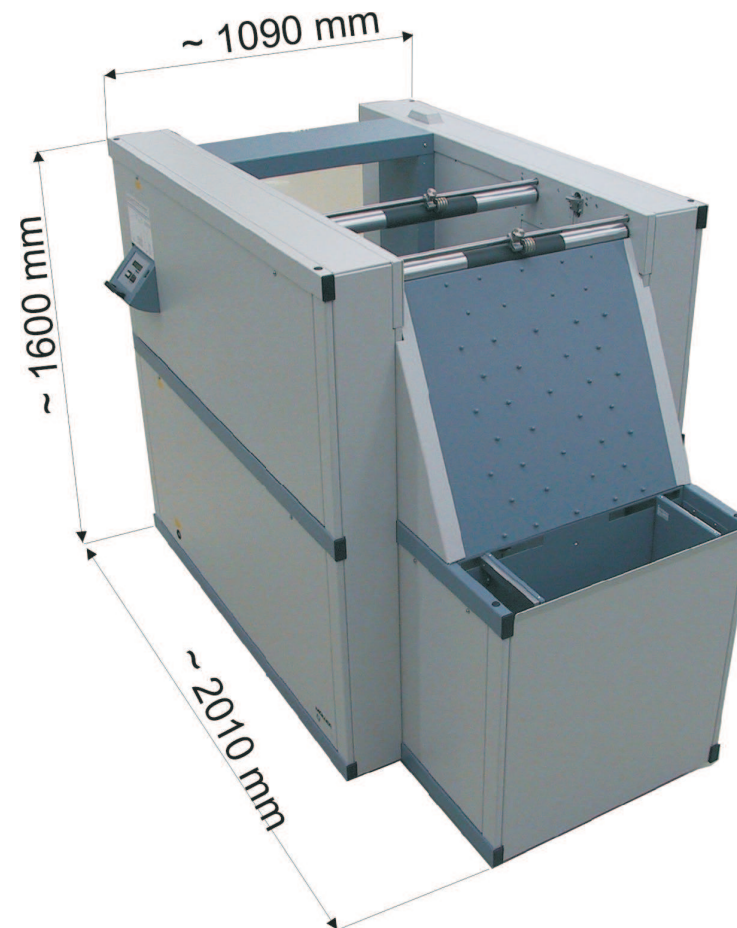

MÜLLER

Apparatebau GmbH
Industriepark
D-85402 Kranzberg

+49 8166 670-0 FAX -333
Email: info@mueller-apparatebau.de