



Shingling Conveyor (Conveyors)

Overview

The Shingling Conveyor provides flexibility and versatility wherever product collection is required. The slow-moving design allows products to be collected in a shingled manner and the amount of shingle can be controlled by the variable speed control. The high-torque drive system is designed to handle large work-loads ensuring years of dependable operation.

Standard Features


- Heavy-duty construction
- Powder coated steel frame for durability
- Variable speed control for shingling control
- Long lasting, durable belt (choose from a single 10" wide belt or two 3" wide adjustable belts)
- End plate with cut-out for easy and safe removal of collected product
- Casters for portability
- Non-skid levelers for variable height adjustment
- Inline or 90-degree interface to accommodate available floor space

Applications (ask us about your application)

- | | | |
|-----------------|--------------|---------------|
| Addressing | Verification | Attaching |
| Labeling | Tabbing | Date Stamping |
| Scanning | Coding | |
| Tip-on/Affixing | Printing | |

Products (ask us about your products)

- | | | |
|-------------|-------------------|------------------|
| Sheet Paper | Backer Board | Folded Documents |
| Manuals | Collapsed Cartons | Folders |
| Cardstock | Envelopes | Booklets |
| Post Cards | Brochures | and more... |

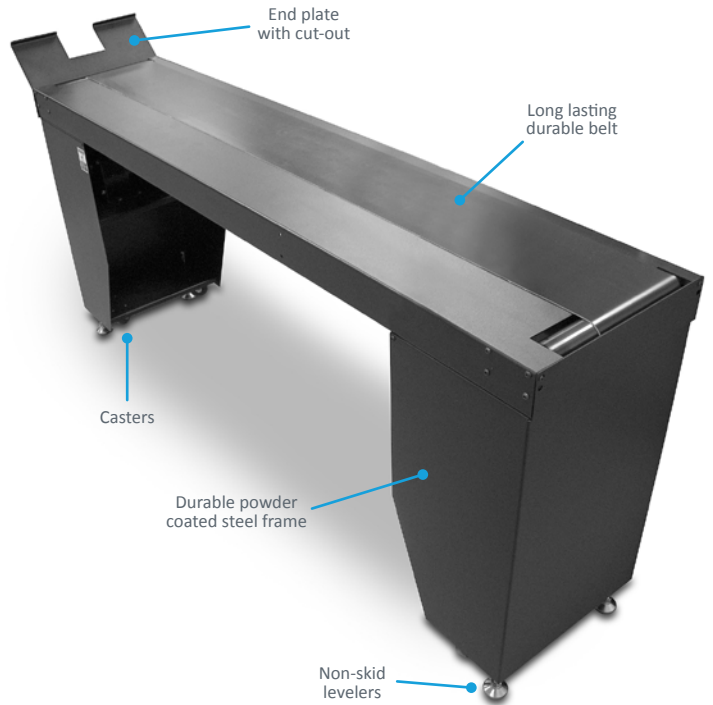

Specifications	
Maximum Product Size	12 W x 12 L in (305 x 305 mm)*
Minimum Product Size	4 W x 4.0 L in (102 x 102 mm)*
Speed	Variable, 63 feet/minute (19.3m/min)
Utilities	115vac, 50/60Hz, 5A
Discharge Height	29.5-33.5 in (75-85 cm)
Dimensions	72 L x 15.5 W in (183 x 39 cm)
Warranty	One year limited

*Other lengths available. Contact us for your application. Maximum conveyor width is 15 inches.

Footprint drawing available at:
www.streamfeeder.com/footprints.html
or scan the QR Code



AMBEC | Fleetwood | Goldco | Nigrelli | Streamfeeder | SWF | Thiele

